


LED Maxi bulkhead

SPECIFICATIONS

- IP65 Rated & Strong PC Covers - Ideal for Indoor & Outdoor Use
- MW Sensor / Emergency / MW Sensor & Emergency versions available
- 5 Year warranty - 3 Year warranty on Emergency
- Easy adjustment of time delay, range, sensitivity, and lux (MW versions)
- Up to 10m Detection distance (MW versions)
- 3 Hour Emergency battery backup (EM versions)

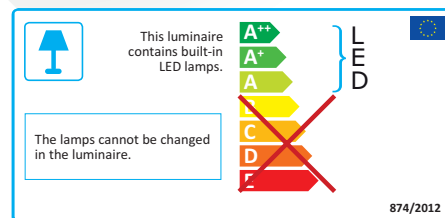

Model	Power	Luminous Flux (lm)	Efficiency (lm/W)	CRI	Colour Temp	Size (mm)
MAXI1540STD	15W	1400	93	≥80	4000K	320mm Dia x 100mm
MAXI1564STD	15W	1400	93	≥80	6400K	320mm Dia x 100mm
MAXI1530MW	15W	1400	93	≥80	3000K	320mm Dia x 100mm
MAXI1540MW	15W	1400	93	≥80	4000K	320mm Dia x 100mm
MAXI1564MW	15W	1400	93	≥80	6400K	320mm Dia x 100mm
MAXI1740EM	17W	1400	93	≥80	4000K	320mm Dia x 100mm
MAXI1740EMMW	17W	1400	93	≥80	4000K	320mm Dia x 100mm

Technical Specifications

Body Type: PC Body

LED Chip Type
SMD-Samsung Chip

IP Rating: IP65

Dimmable: MW & EMMW

PF: >0.9

CRI >80

Operation Temp: -20°C to +45°C

Input Power: AC 200-240V, 50/60Hz

Variants available

Emergency Variant: 2W Emergency Standby Watts, Ni-CD AA, 7.2V 1.0Ah Battery Type, >3hrs Emergency Operation Time

MW Sensor Variant: Max 10m Dia x 4m Detection Range, 10s - 1min - 5min - 10m customizable hold time, Daylight Sensor

Emergency / MW Sensor Variant: 2W Emergency Standby Watts, Ni-CD AA, 7.2V 1.0Ah Battery Type, >3hrs Emergency Operation Time, Max 10m Dia x 4m Detection Range, 10s - 1min - 5min - 10m customizable hold time, Daylight Sensor