

DATASHEET

PROCURELED

LIGHTING SOLUTION SPECIALIST

LED Linear


SPECIFICATIONS

- IP44 Rated
- Powerful LED light source with a unique design
- 5 Year warranty
- Excellent heat dissipation due to aluminum housing
- High Thermal Conductivity, Low Luminous Decay



APPLICATIONS

Industrial Usage / Warehouse & Supermarkets / Workshop's /
Factories / Warehouses / Highway / Toll Stations / Gas Stations /
Malls / Exhibition Halls / Stadium's

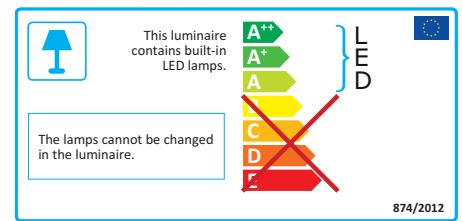

Model	Power	Luminous Flux (lm)	Efficiency (lm/W)	CRI	Colour Temp	Size (mm)
LIN100240STD	100W	10000	100	≥80	4000K	625 x 115 x 110mm
LIN100260STD	100W	10000	100	≥80	6000K	625 x 115 x 110mm
LIN100240STD	150W	15000	100	≥80	4000K	898 x 115 x 110mm
LIN100260STD	150W	15000	100	≥80	6000K	898 x 115 x 110mm
LIN100240STD	200W	20000	100	≥80	4000K	1170 x 115 x 110mm
LIN100260STD	200W	20000	100	≥80	6000K	1170 x 115 x 110mm

Technical Specifications

Body Type: Die Cast Aluminium Body
LED Chip Type: SMD
Beam Angle: 120 Degree
IP Rating: IP44
PF: >0.9
CRI: >80
Operation Temp: -20°C to +45°C
Input: AC: 220-240V 50/60Hz

www.procureled.com

T: +44 (0)1952 250800 E: info@procureled.com

Waterloo House, Waterloo Road, Ketley Business Park, Ketley, Telford, TF1 5JD



ACCREDITED SUPPLIER



Part of the **PROCUREGROUP**