

DATASHEET

Danae Downlight LED



SPECIFICATIONS

- A modern recessed LED downlight with deepened diffuser
- Suitable for plasterboard or similar ceiling types: cutout required Ø75mm, Ø95mm, Ø150mm, Ø200mm
- ECG on/off as standard
- IP44 rated as standard
- 5 year warranty



APPLICATIONS

Office / Education / Healthcare / Retail / Corridor /
Showroom / Household / Hotel / Bathroom / Exhibition

Model	Power	Efficacy (lm/W)	Luminaire Lumens (lm)	CRI	Colour Temp*	Size (mm)
DAN740STD	7W	100	700	≥80	4000K	92Ø Dia x 64
DAN1040STD	10W	98	980	≥80	4000K	113Ø Dia x 73
DAN1440STD	14W	100	1400	≥80	4000K	174Ø Dia x 79
DAN2040STD	20W	103	2060	≥80	4000K	244Ø Dia x 95

* Luminaire available in colour temperatures of 3000K & 4000K

Technical Specification

Body Type: White PC, tool free spring clip installation

Diffuser: Opal, UV stable

Input Voltage:



AC:220-240V, 50/60Hz

Power Factor: > 0.6

IP Rating: IP44

IK Rating: IK04

Operating Temp: 0°C to + 35°C

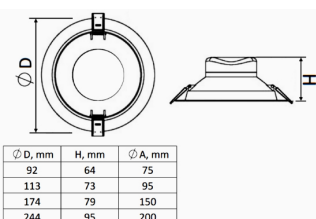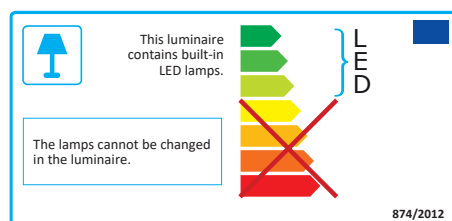

www.procureled.com

T: +44 (0) 1952 250800 E: info@procureled.com

Waterloo House, Waterloo Road, Ketley Business Park, Ketley, Telford, TF1 5JD



Part of the **PROCUREGROUP**