

## DATASHEET

# Athena Flood LED

## SPECIFICATIONS

- A modern architectural LED floodlight
- Available in a wide choice of optics: 30°, 45°, 60°, 90°, asymmetric and street light beam. 90° as standard
- ECG on/off as standard, DALI option available
- IP65 rated as standard
- 5 year warranty



## APPLICATIONS

Park / Public Space / Industry / Parking Area / Sports /  
Facade Illumination / Street / Exterior

Model*	Power	Efficacy (lm/W)	Luminaire Lumens (lm)	CRI	Colour Temp	Size (mm)
ATH3440STD90D	34W	125	4319	≥70	4000K	338 x 280 x 60
ATH5340STD90D	53W	114	6036	≥70	4000K	338 x 280 x 60
ATH6940STD90D	69W	126	8712	≥70	4000K	444 x 353 x 66
ATH10640STD90D	106W	114	12072	≥70	4000K	444 x 353 x 66
ATH13240STD90D	132W	114	15090	≥70	4000K	515 x 420 x 87
ATH15940STD90D	159W	114	18102	≥70	4000K	515 x 420 x 87
ATH21240STD90D	212W	114	24144	≥70	4000K	515 x 420 x 87

\* DALI option available, please enquire

\* Available in a wide choice of optics; please enquire to specify. (90° beam as standard)

### Technical Specification

Body Type: Die-cast aluminum, dark grey finish

Diffuser: Tempered glass, clear, impact resistant


Input Voltage: AC:220-240V, 50/60Hz

Power Factor: > 0.90

IP Rating: IP65

IK Rating: IK08

Operating Temp: -25°C to + 40°C

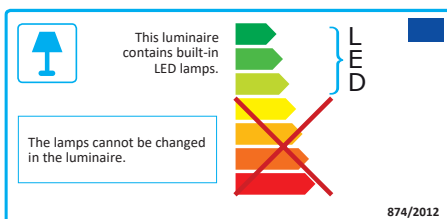

[www.procureled.com](http://www.procureled.com)

T: +44 (0) 1952 250800 E: [info@procureled.com](mailto:info@procureled.com)

Waterloo House, Waterloo Road, Ketley Business Park, Ketley, Telford, TF1 5JD



Part of the **PROCUREGROUP**